




Panic Hardware

# DORMA PHA 2000 PHB 3000 Exit Pad


in Contur design



## Das modulare DORMA Panic Hardware-System im Contur Design

Prior knowledge of how to open the escape door is not expected.

**DANGER OF PANIC**



**EN 1125**

Panic exit devices operated  
by a horizontal bar

**DORMA PHA 2000**



**DORMA PHB 3000**




### Approval certification

The Panic Hardware products of the series DORMA PHA 2000 and PHB 3000 have been tested to and certified compliant with EN 1125. All products meet the requirements of Annex ZA to EN 1125 and are therefore qualified to bear the **CE** mark of conformity.

Prior knowledge of how to open the escape door is expected.

**NO DANGER OF PANIC**



**EN 179**

Emergency escape devices with exit pad

## Advanced, high-spec fittings for emergency exit doors

With this system, DORMA is able to offer a comprehensive range of high-quality panic hardware fittings with horizontal and vertical locking for doors in emergency exits and escape routes – applications in which safety, reliability and aesthetic attractiveness are indispensable requirements. DORMA's PHA and PHB products cover in full the hardware requirements that arise in

public-frequented facilities such as hospitals, universities and schools, concert halls, shopping malls, hotels and administrative buildings. Whether office suites or apartment blocks, in buildings where there is generally no public pedestrian traffic, the DORMA Exit Pad provides the ideal answer. For both series, the same external DORMA PHT fittings are used.

**DORMA Exit Pad**




### Approval certification

The emergency exit devices of the DORMA Exit Pad series are tested to and certified compliant with EN 179. All products meet the requirements of Annex ZA to EN 179 and are therefore qualified to bear the **CE** mark of conformity.



Additional information on many products can be viewed and retrieved at [www.dorma.com](http://www.dorma.com)

The abbreviated designations next to the computer symbol  indicate the search terms.

### Contents

	Page
<b>DORMA PHA 2000/PHB 3000</b> Features and functions	4
<b>DORMA PHA 2000</b> Dimensions	6
<b>DORMA PHA 2000</b> Applications and fixing details	7
<b>DORMA PHB 3000</b> Dimensions	8
<b>DORMA PHB 3000</b> Applications and fixing details	9
<b>DORMA PHA 2000/PHB 3000</b> Components	10
<b>DORMA Exit Pad</b> Features and functions	16
<b>DORMA Exit Pad</b> Dimensions	18
<b>DORMA Exit Pad</b> Applications and fixing details	19
<b>DORMA Exit Pad</b> Components	20
<b>DORMA PH</b> Accessories	22
<b>DORMA PH</b> Accessories – Applications and fixing details	24
<b>DORMA PHT external hardware</b>	26

## Practical panic hardware for many door situations

With the series PHA 2000 crossbar and the series PHB 3000 pushbar combined with the universally applicable PHT external fittings, DORMA is able to offer a range suitable not only for narrow-stile system doors but also timber and similar full-face doors.

The wide security latchbolt engages in a keeper that is normally mounted on the frame. This ensures that the latch is extremely easy to mount and that the door is also securely locked.

### Benefits

#### For the trade

- Modular system for reduced storage costs
- Non-handed
- Universal use of PHT external fittings

#### For the installer

- Straightforward fixing
- Easy adjustment to different door widths and heights

#### For the architect/specifier

- For horizontal and vertical panic lock mechanisms
- External fitting with OGRO bespoke lever handle or knob
- Electrical functions for special applications

#### For the user

- Simple operation
- Excellent quality ensures long lifespan
- Universal electric strike

Data and features	PHA 2000			PHB 3000		
	1-point	2-point	3-point	1-point	2-point	3-point
Modular system	●	●	●	●	●	●
Standard (non-expandable)	–	●	–	●	–	–
Standard doors (single-leaf/double-leaf)	●	●	●	●	●	●
Fire and smoke check doors (single-leaf/double-leaf) <b>F</b>	●	●	●	●	●	●
Door width	≤ 1000 mm	●	●	●	●	●
	≤ 1300 mm	●	●	●	●	●
Door height	≤ 2270 mm		●			
	≤ 3400 mm <sup>1)</sup>		●			
	≤ 2265 mm				●	●
	≤ 3200 mm <sup>1)</sup>				●	●
Max. door leaf weight in kg	200	200	200	200	200	200
Non-handed design	●	●	●	●	●	●
Dogging device <sup>2)</sup>	●	●	●	●	●	●
Security anti-thrust latch	for standard doors			●	●	●
	for fire and smoke check doors	●	●	●	●	●
Unlocking via electric strike	○	○	○	○	○	○
Monitoring switch on actuating bar	○	○	○	○	○	○
PHT external fittings						
For standard doors and fire and smoke check doors	●	●	●	●	●	●
For door leaf thicknesses up to 60 mm						
Extended handle spindle and bolts for door leaf thicknesses of 60 – 105 mm	○	○	○	○	○	○
Approved to EN 1125	●	●	●	●	●	●
<b>CE</b> mark for construction products	●	●	●	●	●	●

● = Yes    – = No    ○ = Option


<sup>1)</sup> Doors higher than 2500 mm lie outside the scope of EN 1125.

<sup>2)</sup> Not for Fire and smoke check doors.

### **F** Approval certification

The panic hardware products marked with an **F** are approved for use with fire and smoke check doors. Approval certification for the fire and smoke check

door in conjunction with the DORMA panic hardware product is additionally required in some countries – check local regulations.

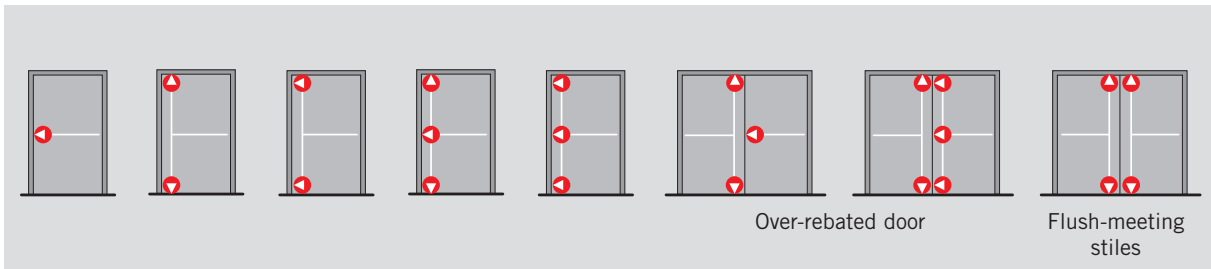

The modular panic hardware system

**PHA 2000**

**PHB 3000**

Single-point locking


2/3-point locking

+

+


**PHT**

Security anti-thrust latch

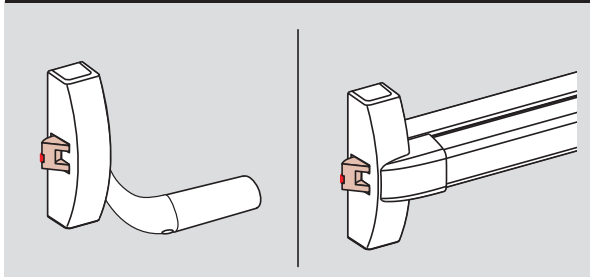


The security anti-thrust latch prevents the latch from being pushed back by unauthorised means when it is in the closed position.

Dogging device


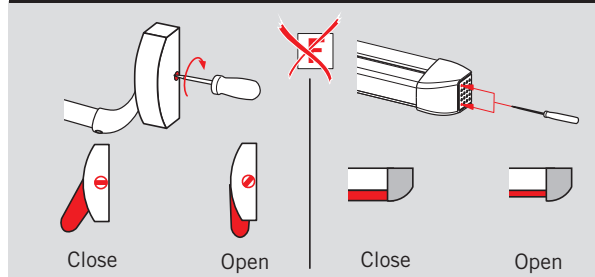


The dogging device serves to hold the latch in its retracted position so the door is freely accessible.


Single-point locking

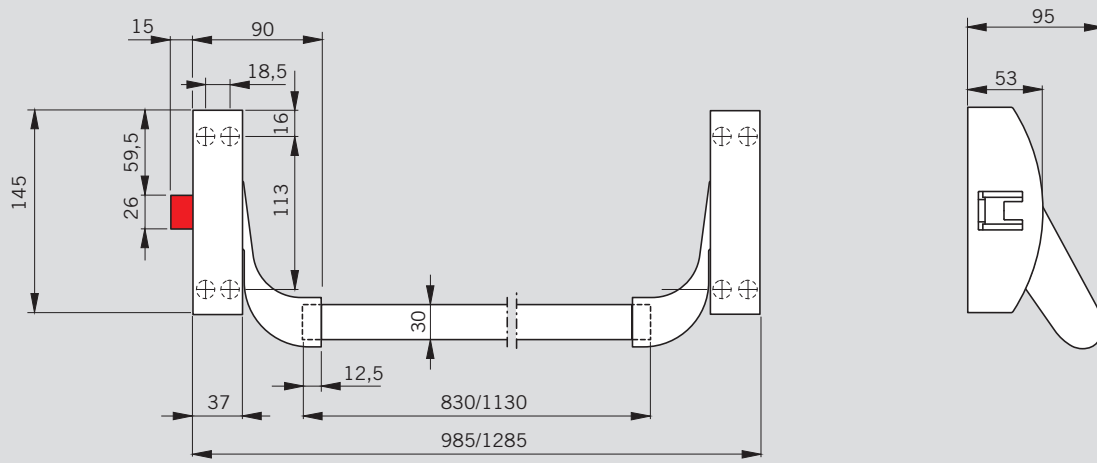

2/3-point locking

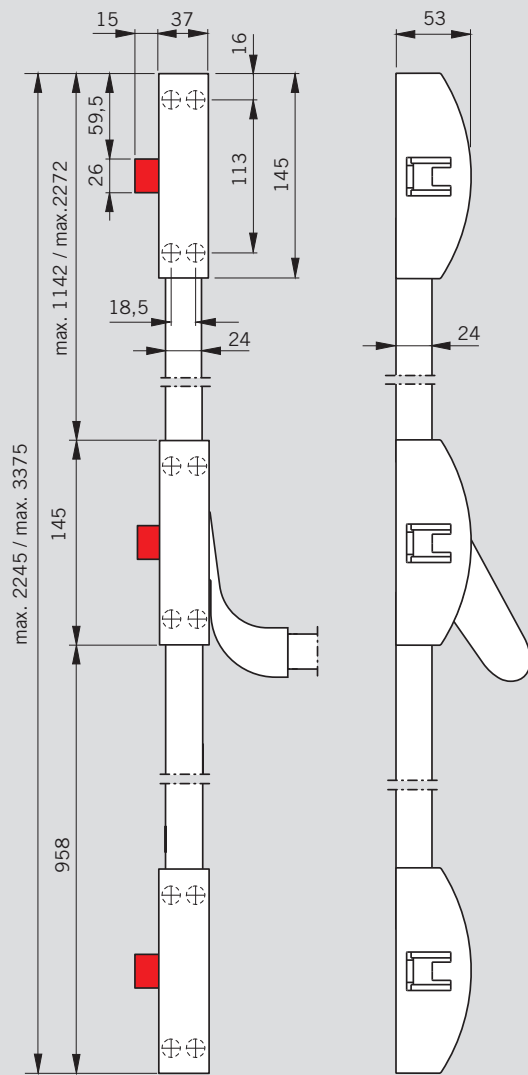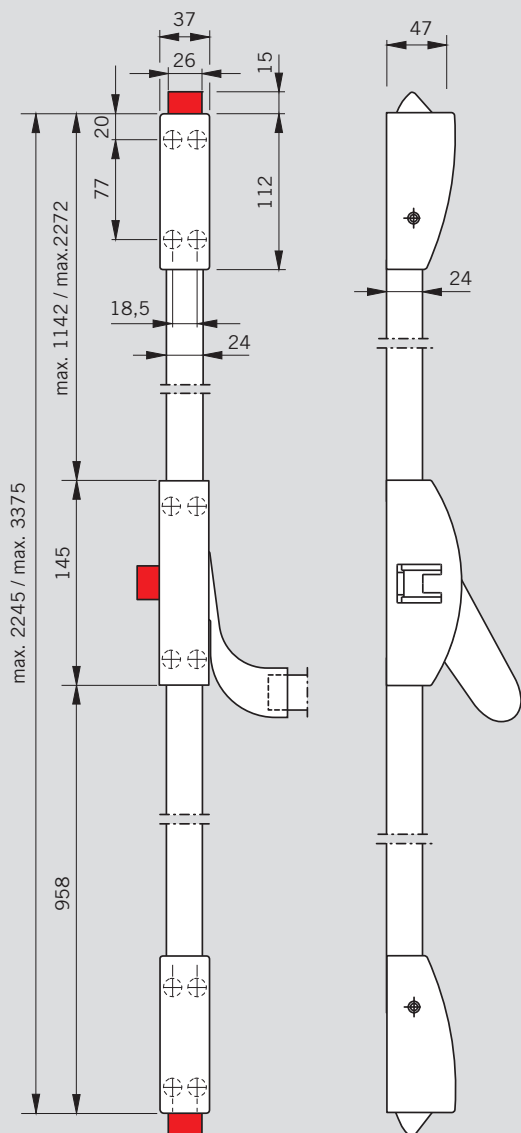


Applications and fixing details

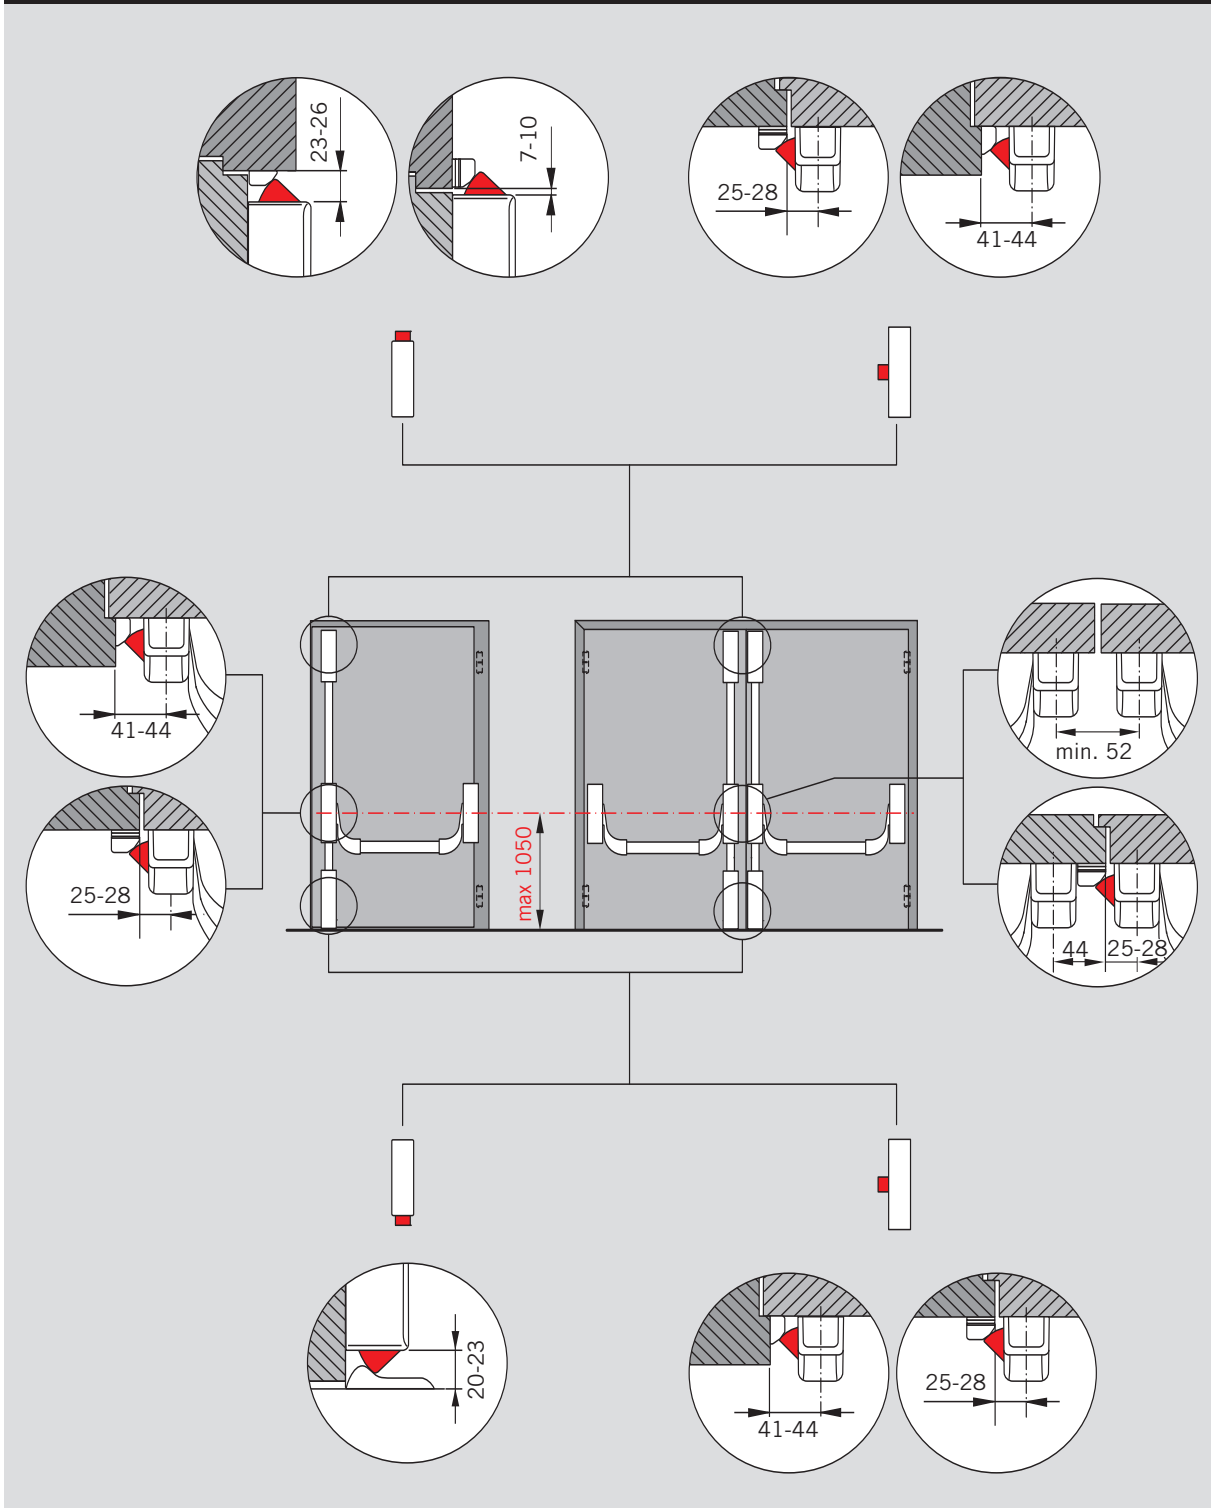


**Note:**

It may be the case that the exit device cannot be installed based on standard measurements where the door situation is extreme, e.g. with a door width



$X < 1000$  mm combined with a hinge offset  $Y > 90$  mm. DORMA will be glad to provide you with installation suggestions on request.

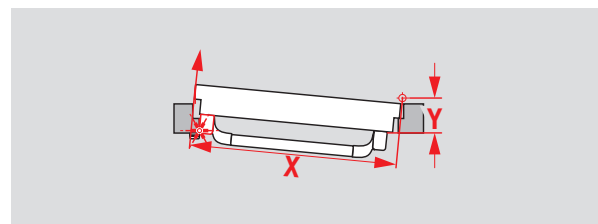

Single-point locking

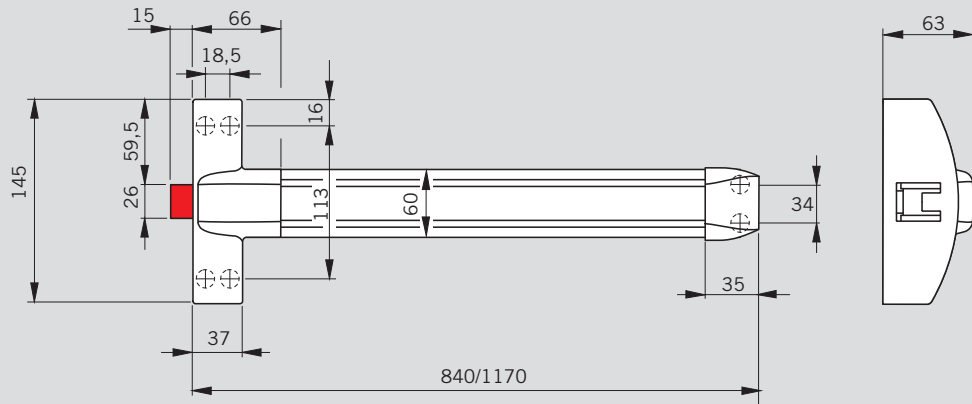


2/3-point locking

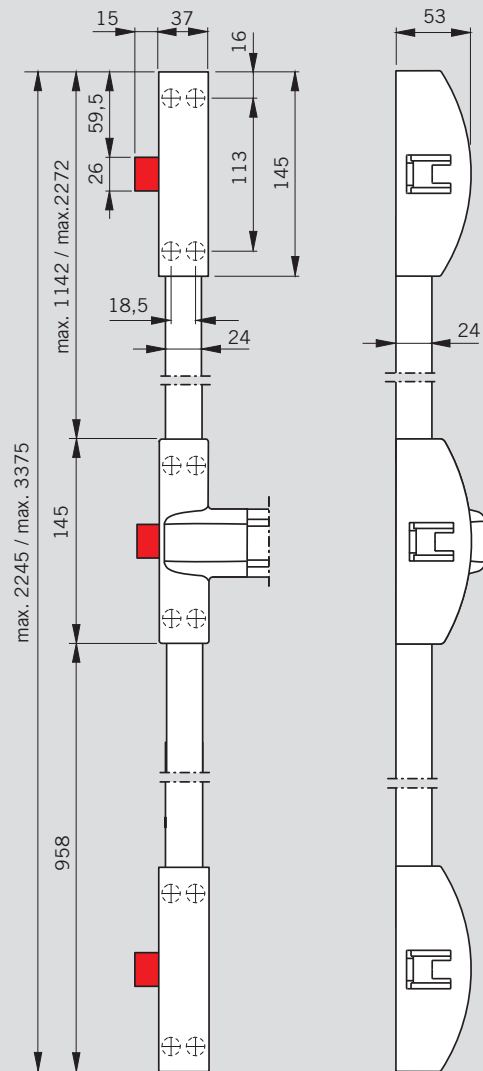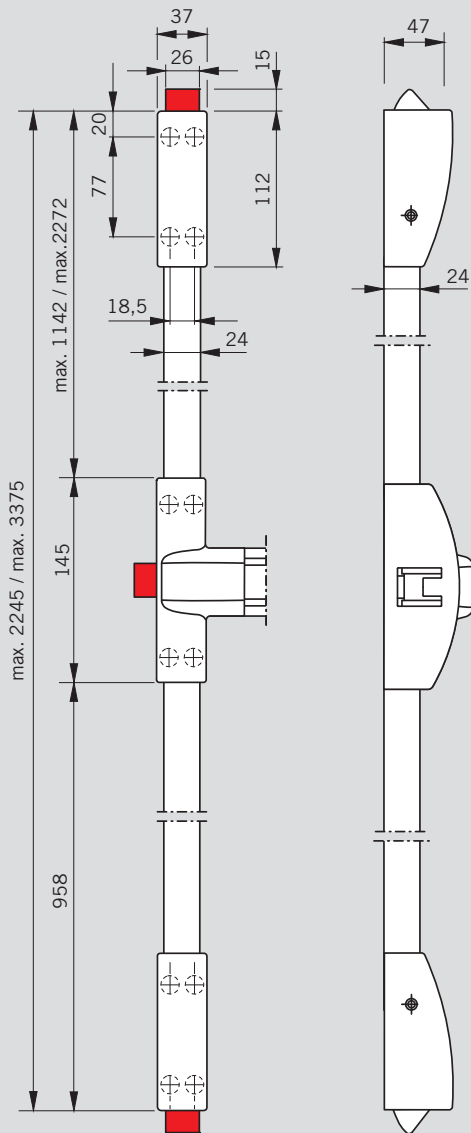




### Applications and fixing details

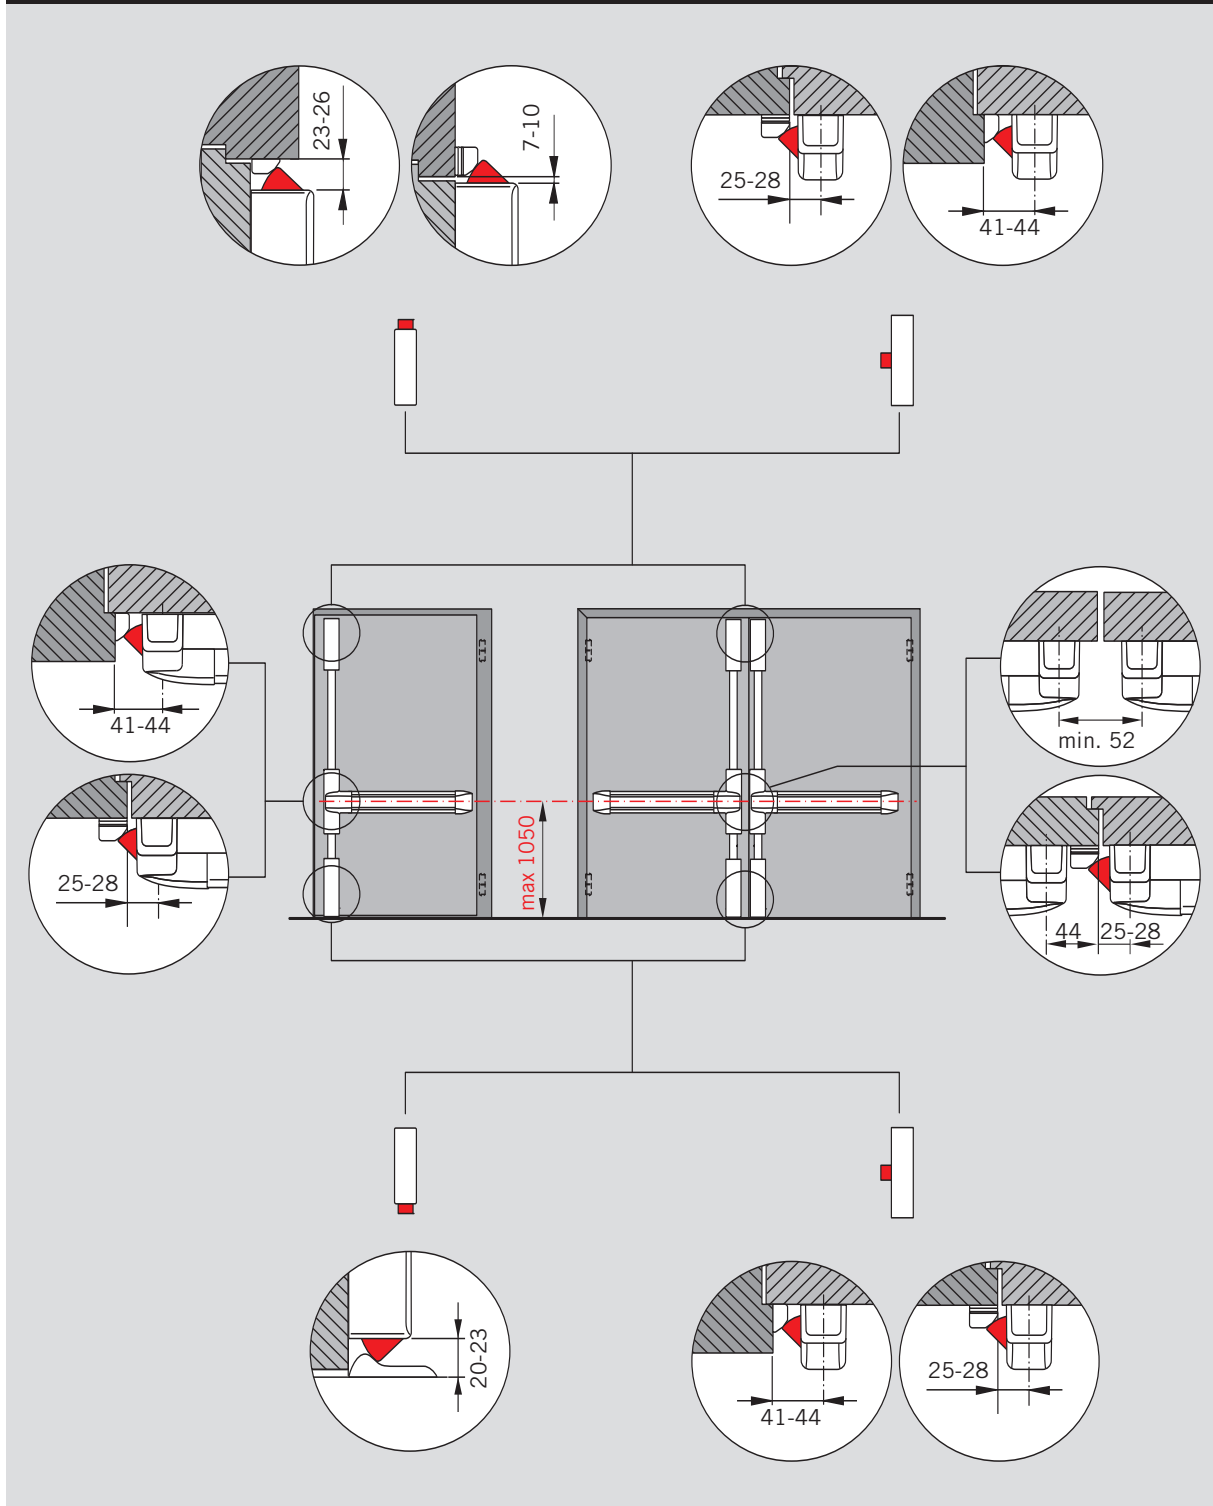

#### Note:

It may be the case that the exit device cannot be installed based on standard measurements where the door situation is extreme, e.g. with a door width

$X < 1000$  mm combined with a hinge offset  $Y > 90$  mm. DORMA will be glad to provide you with installation suggestions on request.

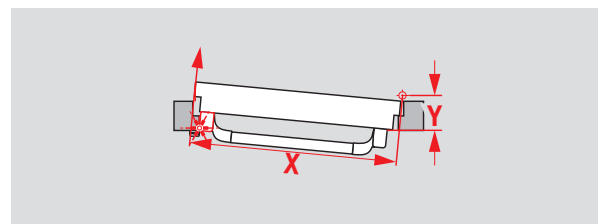

Components on single-leaf doors


Standard doors	Modular 2101	●	●	●	●	●
	Standard 2201		○	○		
	2104 / 05	●	●	●	●	●
	Modular 3102 / 03	●	●	●	●	●
	Standard 3101	○				
	PHX 04 / 05		●	●	●	●
PHX 02 PHX 06			●	●	●	
Fire and smoke check doors <b>F</b>	Modular 2102	●	●	●	●	●
	Standard 2201		○	○		
	2104 / 05	●	●	●	●	●
	Modular 3104 / 05	●	●	●	●	●
	PHX 04 / 05		●	●	●	●
	PHX 03 PHX 07			●	●	●

**F** Approval certification







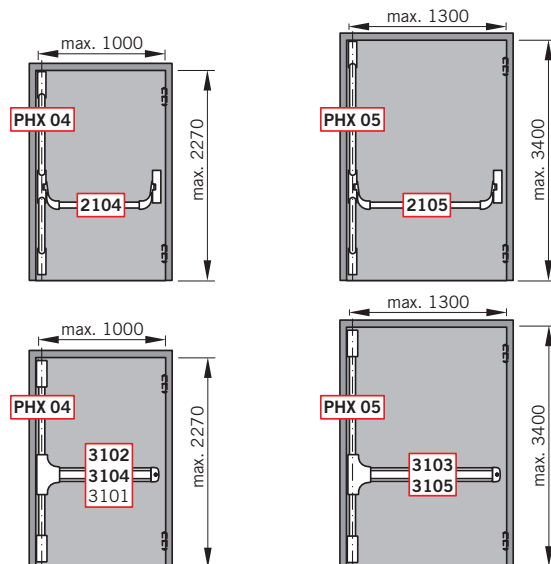








The DORMA panic hardware products of the series DORMA PHA 2000/PHB 3000 in the Contur design marked with the **F** symbol have been approved for use on fire and smoke check doors. In some countries, approval certification of the fire and smoke check doors to be used is additionally required.





**CE**

The panic hardware products of the series DORMA PHA 2000/PHB 3000 in the Contur design carry the **CE** mark of conformity.



**Components on double-leaf doors**

Over-rebated door		Flush-meeting stiles					
Inactive leaf	Active leaf	Inactive leaf	Active leaf	Inactive leaf	Active leaf		
●	●	●	●	●	●	2101	 <b>Modular</b>
○		○		○	○	2201	 <b>Standard</b>
●	●	●	●	●	●	2104 / 05	
●	●	●	●	●	●	3102 / 03	 <b>Modular</b>
	○					3101	 <b>Standard</b>
●		●	●	●	●	PHX 04 / 05	
●		●	●	●	●	PHX 02	
			●			PHX 06	
●	●	●	●	●	●	2102	 <b>Modular</b>
○		○		○	○	2201	 <b>Standard</b>
●	●	●	●	●	●	2104 / 05	
●	●	●	●	●	●	3104 / 05	 <b>Modular</b>
●		●	●	●	●	PHX 04 / 05	
●		●	●	●	●	PHX 03	
			●			PHX 07	

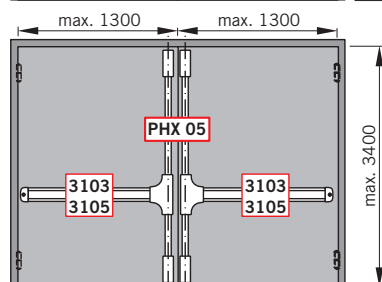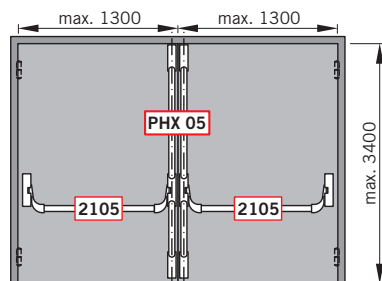

○ = Optional  
For external hardware, see page 26

**Note:**

According to EN 1125, the effective length of the operating bar has to be at least 60% of the door width. Doors higher than 2500 mm lie outside the scope of EN 1125.

**Specification text**

**Order No. 35014 ..**



**PHA 2000**


Panic door bolt tested in accordance with EN 1125, for door widths up to 1300 mm, door heights up to 2270 (in accordance with EN 1125) or 3400 mm; reversible for use on LH/ISO 6 and RH/ISO 5 doors. Can be unlocked electrically via electric strike. All products of the PHA 2000 series carry the **CE** mark.

**PHA 2101**

Single-point locking, modular, for standard doors, without security anti-thrust latch, with dogging device. Die-cast zinc latch, zinc latch keeper with spacer plates, plastic mounting backplate.

- silver finish
- black
- white

..21011001  
..21011002  
..21011010 PHA 2101




**PHA 2102 F**

Single-point locking, modular, for fire and smoke check doors, with security anti-thrust latch and dogging device. Steel latch, steel latch keeper with spacer plates, plastic mounting backplate.

- silver finish
- black
- white
- stainless steel finish

..21021001  
..21021002  
..21021010  
..21021004 PHA 2102




**PHA 2201**

Two-point locking only, with dogging device. Plastic mounting backplate.

- silver finish
- black
- white

..22011001  
..22011002  
..22011010 PHA 2201




**PHA 2104**

Connecting rod 830 mm (for door widths up to 1000 mm)

- silver finish
- red
- black
- white

..21041001  
..21041002  
..21041019  
..21041010 PHA 2104




**PHA 2105**


Connecting rod 1130 mm (for door widths up to 1300 mm)


- silver finish
- red
- black
- white
- stainless steel finish

..21051001  
..21051002  
..21051019  
..21051010  
..21051004 PHA 2105



See page 22 for accessories such as adjustable keepers, electric strikes or micro switches for signal actuation.

**Specification text**
**Order No. 35014 ..** 
**PHA 3000**

Panic door bolt tested in accordance with EN 1125, for door widths up to 1300 mm, door heights up to 2265 mm (in accordance with EN 1125) or 3200 mm, non-handed. Can be unlocked electrically via electric strike. All products of the PHB 3000 series carry the  mark.


**PHB 3101**

Single-point locking, standard, for standard doors with a door width up to 1000 mm, with security anti-thrust latch and dogging device.

Die-cast zinc latch, steel latch keeper with spacer plates.

- silver finish
- white


..31011001  
 ..31011010  PHB 3101



**PHB 3102**

Single-point locking, modular, for standard doors with a door width up to 1000 mm, with security anti-thrust latch and dogging device.

Die-cast zinc latch, steel latch keeper with spacer plates.

- silver finish
- white

..31021001  
 ..31021010  PHB 3102



**PHB 3103**

Single-point locking, modular, for standard doors with a door width up to 1300 mm, with security anti-thrust latch and dogging device.

Die-cast zinc latch, steel latch keeper with spacer plates.

- silver finish
- white

..31031001  
 ..31031010  PHB 3103



**PHB 3104 **

Single-point locking, modular, for fire and smoke check doors with a door width up to 1000 mm, with security anti-thrust latch and dogging device.

Steel latch, steel latch keeper with spacer plates.

- silver finish
- white
- stainless steel finish

..31041001  
 ..31041010  
 ..31041004  PHB 3104



**PHB 3105 **

Single-point locking, modular, for fire and smoke check doors with a door width up to 1300 mm, with security anti-thrust latch and dogging device.

Steel latch, steel latch keeper with spacer plates.

- silver finish
- white
- stainless steel finish

..31051001  
 ..31051010  
 ..31051004  PHB 3105




**Specification text**


**Order No. 35014 ..** 

**PHX 02**

Top and bottom lock combination, without security anti-thrust latch. Die-cast zinc latch, zinc top latch keeper with spacer plates, steel bottom latch keeper.

- silver finish
- black
- white


..22021001  
..22021002  
..22021010  PHX 02




**PHX 03 F**

Top and bottom lock combination, for fire and smoke check doors, with security anti-thrust latch. Steel latch, steel top latch keeper with spacer plates, steel bottom latch keeper.

- silver finish
- black
- white
- stainless steel finish


..22031001  
..22031002  
..22031010  
..22031004  PHX 03




**PHX 06**

Top and bottom locking combination with lateral latch, without security anti-thrust latch. Die-cast zinc latch, steel latch keepers with spacer plates.

- silver finish
- black
- white


..22061001  
..22061002  
..22061010  PHX 06




**PHX 07 F**

Top and bottom locking combination with lateral latch, for fire and smoke check doors, with security anti-thrust latch. Steel latch, steel latch keepers with spacer plates.

- silver finish
- black
- white
- stainless steel finish

..22071001  
..22071002  
..22071010  
..22071004  PHX 07




**Specification text**
**PHX 04** 



Connecting rod set with cover for door heights up to 2270 mm.

Steel latch keeper with spacer plates for double doors.

- silver finish
- black
- white
- stainless steel finish

**Order No. 35014 ..** 


- ..22041001
- ..22041002
- ..22041010
- ..22041004  PHX 04



**PHX 05** 

Connecting rod set with cover for door heights up to 3400 mm.

Steel latch keeper with spacer plates for double doors.

- silver finish
- black
- white
- stainless steel finish

- ..22051001
- ..22051002
- ..22051010
- ..22051004  PHX 05



## Emergency exits protected in accordance with EN 179

The fittings of the DORMA Exit Pad series are high-quality emergency exit devices for doors in escape routes and can be combined with the components of the PHA 2000/PHB 3000 series. They are used in buildings with no public pedestrian traffic. It is expected that people using the building are familiar with the exits

and their fittings, avoiding the likelihood of a panic situation developing. All products of the DORMA Exit Pad series have been tested to and certified compliant with EN 179. They correspond to the requirements of Annex ZA to EN 179 and can therefore carry the **CE** mark of conformity.

### Benefits

#### For the trade

- All-in-one packaging for easy stocking
- Non-handed
- Universal use of PHT external fittings

#### For the installer

- Straightforward fixing
- Easy adjustment to different door widths and heights

#### For the architect/specifier

- High-quality appearance with no visible fixings.
- Connecting rods with metal covers.
- External fitting with OGRO bespoke lever handle or

#### For the user


- Simple operation
- Excellent quality ensures long lifespan

Data and features	Exit Pad <sup>1)</sup>	
	1-point	2-point
Standard doors (single-leaf/double-leaf)	●	●
Fire and smoke check doors (single-leaf/double-leaf) <b>[F]</b>	●	●
Door width ≤ 1300 mm	●	–
Door height ≤ 2270 mm	–	●
Max. door leaf weight (in kg)	200	200
Non-handed	●	●
Security anti-thrust latch	for standard doors	●
	for fire and smoke check doors	–
Unlocking via electric strike	○	○
External fittings type PHT		
For standard doors and fire and smoke check doors	●	●
For door leaf thicknesses up to 60 mm		
Extended handle spindle and bolts for door leaf thicknesses of 60 – 105 mm	○	○
Approved to EN 179	●	●
<b>CE</b> mark for construction products	●	●

● = Yes – = No ○ = Option

<sup>1)</sup> To achieve a three-point locking system, the Exit Pad can be used as a modular single-point locking device in combination with the PHX components from the PHA 2000/PHB 3000 series.



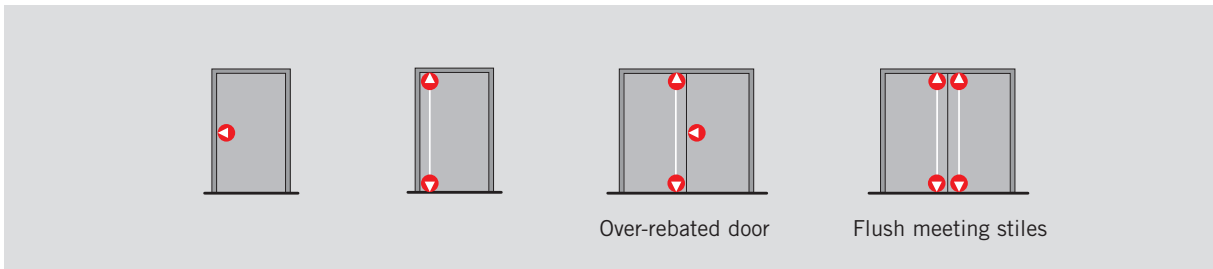


**Exit Pad**


Single-point locking




Two-point locking

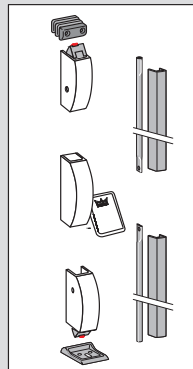

+  
PHT

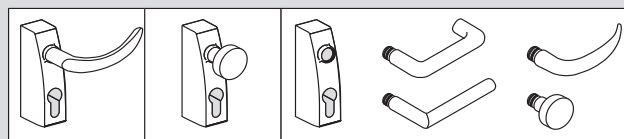


**Anti-thrust security latch**




The security anti-thrust latch prevents the latch from being pushed back by unauthorised means when it is in the closed position.



Single-point locking

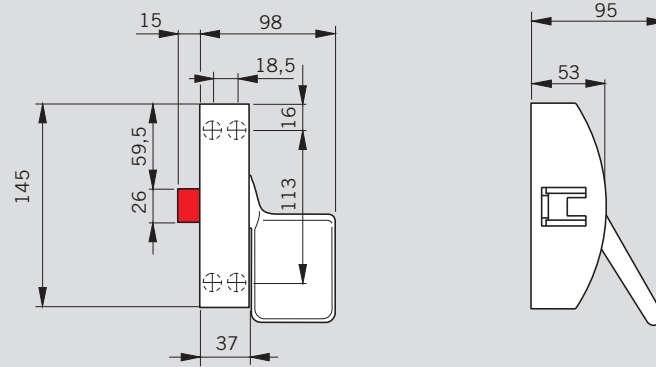

Two-point locking

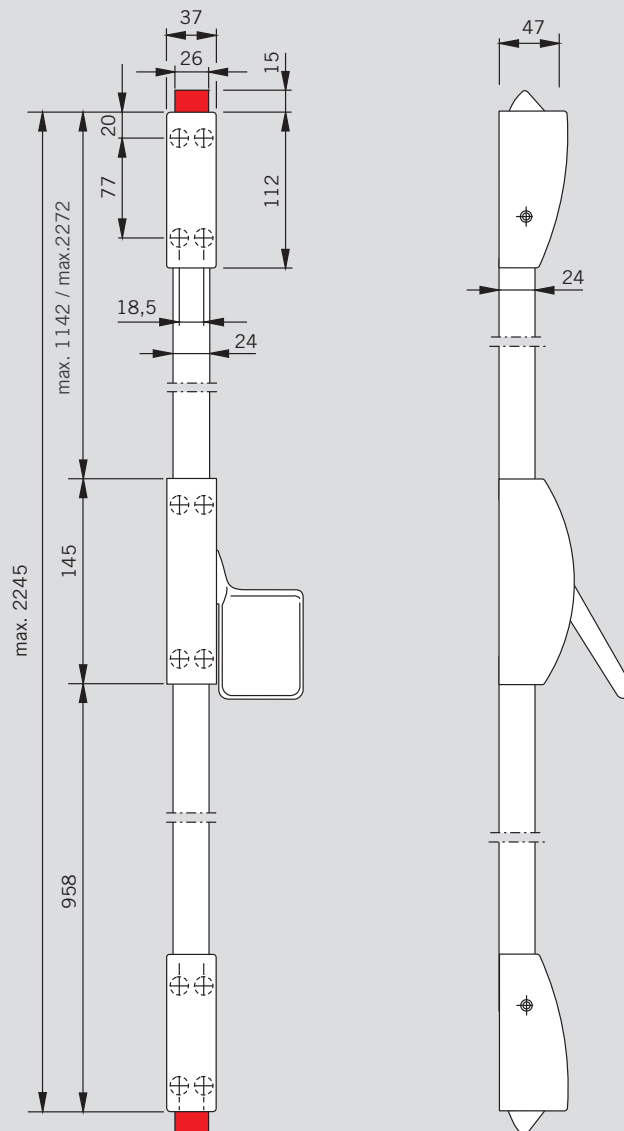

Applications and fixing details

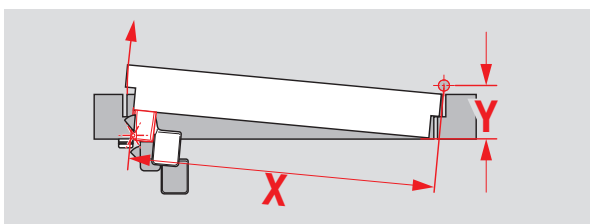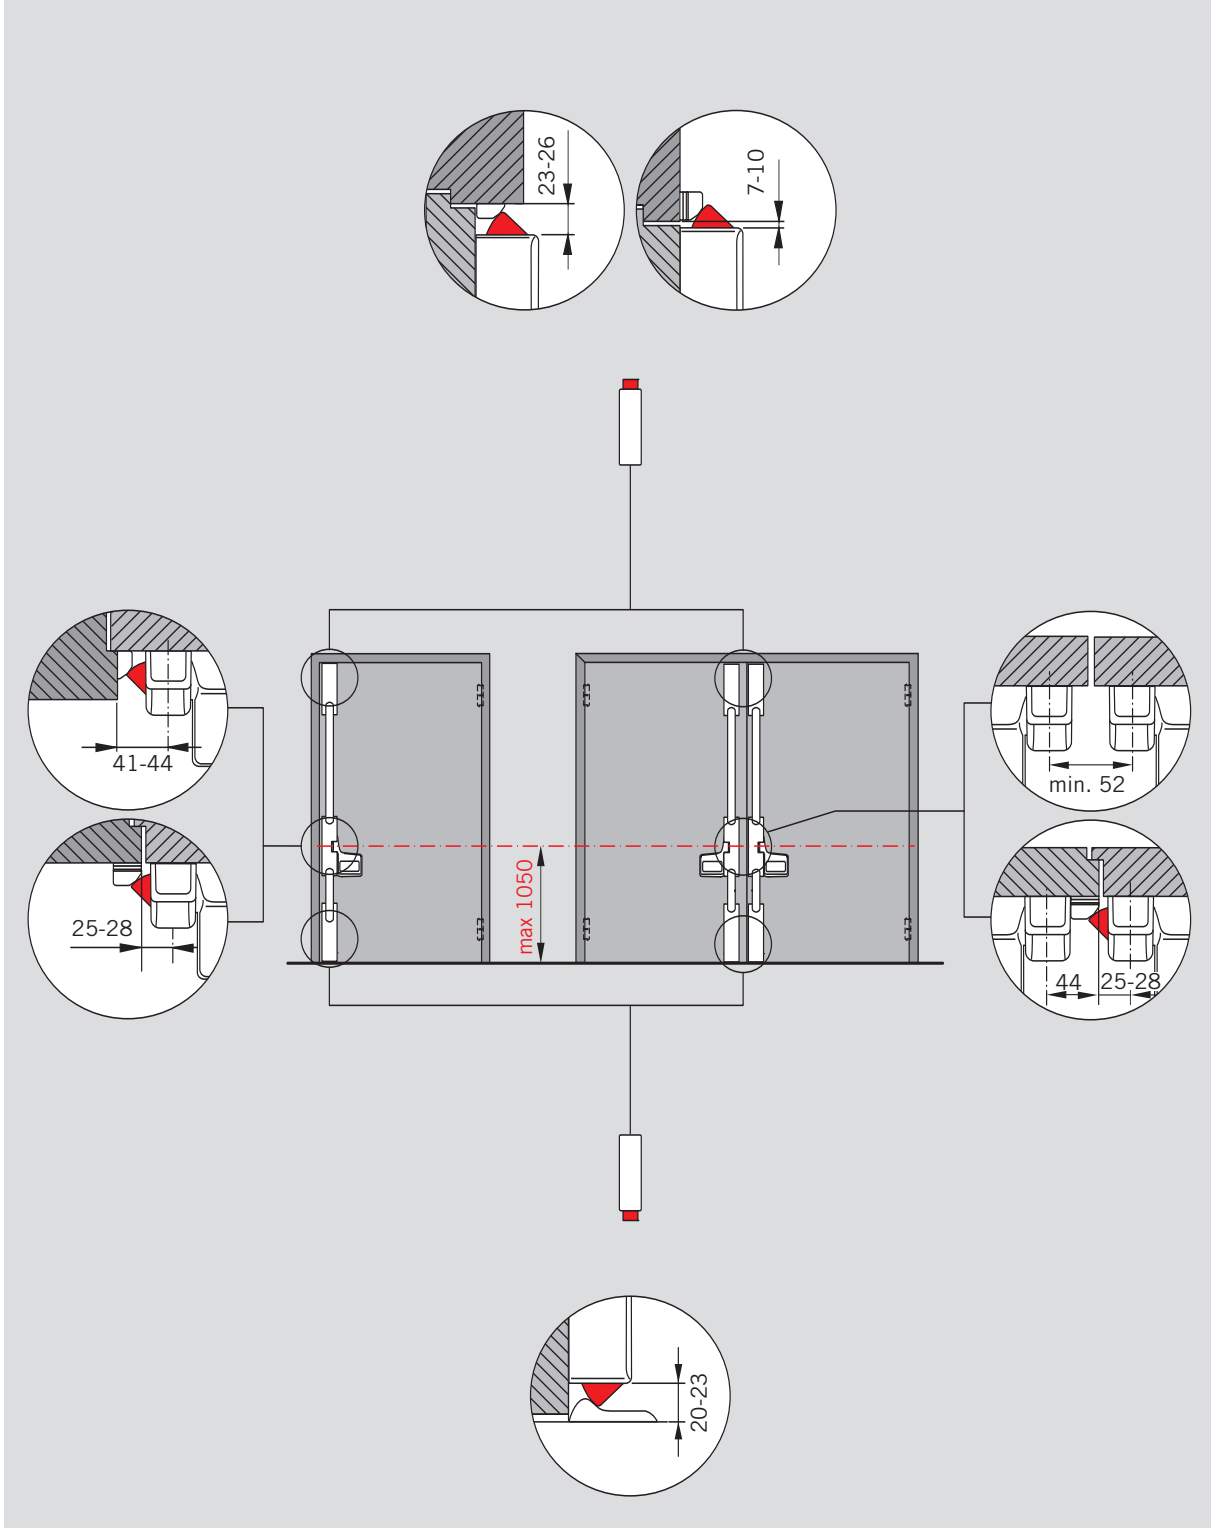

**Note:**


It may be the case that the exit device cannot be installed based on standard measurements where the door situation is extreme, e.g. with a door width

$X < 1000$  mm combined with a hinge offset  $Y > 90$  mm. DORMA will be glad to provide you with installation suggestions on request.

Specification text

Order No. 35014 .. 


**Exit Pad**

Emergency exit device tested and approved to EN 179, convertible to LH or RH. Unlocking via electric strike. All products of the Exit Pad series carry the  mark of conformity.

**Exit Pad**

Single-point locking, modular, for all standard doors, without security anti-thrust latch. Die-cast zinc latch, zinc latch keeper, with spacer plates, plastic mounting bracket.

- silver finish

..21110001  Exit Pad





**Exit Pad F **

Single-point locking, modular, for fire and smoke check doors, with security anti-thrust latch.

Steel latch, steel latch keeper with spacer plates, plastic mounting bracket.

- silver finish
- white
- stainless steel finish

..21120001  
..21120010  
..21120004  Exit Pad





**Exit Pad 2P**

Two-point locking for standard doors, door heights up to 2270 mm, without security anti-thrust latch.

Die-cast zinc latch, zinc latch keeper with spacer plates, plastic mounting bracket.

- silver finish

..22110001  Exit Pad





**Exit Pad F 2P **

Two-point locking, for fire and smoke check doors, door heights up to 2270 mm, with security anti-thrust latch.


Steel latch, steel latch keeper with spacer plates, plastic mounting backplate.

- silver finish
- white
- stainless steel finish


..22120001  
..22120010  
..22120004  Exit Pad




**Note**

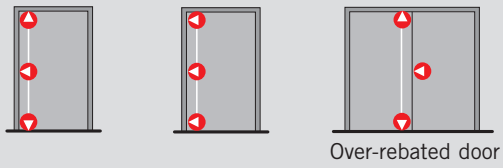


To achieve three-point locking, the modular single-point locking Exit Pad can be used in conjunction with the components of the PHA 2000/PHB 3000 series.




PHX 02




PHX 03




PHX 06



PHX 07



PHX 04



PHX 05

**Specification text**

**Order No. 35014 ..**




**PHX 50 Electric Strike**

In combination with PHA/PHB for use on standard doors with a rebate overlap of up to 24 mm.

Die-cast zinc latch engaging device. 12 V AC, 50 Hz, 15 W

- silver finish
- black
- white
- stainless steel finish

- ..24501001
- ..24501002
- ..24501010 PHX 50
- ..24501004 Zubehör




**PHX 21 Adjustable Keeper**

For standard aluminium narrow-stile doors, single- and double-leaf, flush or over-rebated (0–11 mm)

Die-cast zinc latch (in packs of 5)

- silver finish
- black
- white
- stainless steel finish

- ..24210101
- ..24210102
- ..24210110 PHX 21
- ..24210104 Zubehör



**PHX 22 Adjustable Keeper**

For standard PVC profile doors, single and double leaf, over-rebated (14–24 mm)

Die-cast zinc latch (in packs of 5)

- silver finish
- black
- white
- stainless steel finish

- ..24220101
- ..24220102
- ..24220110 PHX 22
- ..24220104 Accessories




**PHA Microswitch**

For actuation of visual or audible signals.

Contact rating: max. 48 V DC, max. 3 A

- ..25200060 PHA
- Accessories




**PHB Microswitch**

For actuation of visual or audible signals.

Contact rating: max. 48 V DC, max. 3 A

- ..35201061 PHB
- Accessories




**PHX Mounting Backplate**

Steel, galvanised (in packs of 10)

for factory pre-installation to simplify field installation

- ..25200050 PHX
- Accessories



**PHX Mounting Backplate**

Steel, galvanised (in packs of 10)

for factory pre-installation to simplify field installation

- ..25200051 PHX
- Accessories




Specification text	Order No. 35014 ..
--------------------	--------------------

**Accessories for glass doors**

**PHA Glass Kit A**

Installation set for PHA 2000  
Single-point, without external hardware


..24011004 PHA



**PHA Glass Kit B**

Installation set for LH (ISO 6), for PHA 2000  
Single-point, with external fitting


..24021004 PHA



**PHA Glass Kit C**

Installation set for RH (ISO 5), for PHA 2000  
Single-point, with external fitting


..24031004 PHA



**PHA Glass Kit F**

Mounting backplate for steel latch keepers,  
for single and double-leaf doors

..24061004 PHA




**Glass Kit B and C only in conjunction with external fitting PHT 3901 or PHT 3903**

**PHT 3901**

External fitting with OGRO Design lever handle,  
prepared for Europrofile single cylinder.  
With handle spindle and 2 cylinder fixing bolts.

- silver finish
- black
- white

..39010001  
..39010002  
..39010010 PHT 3901





**PHT 3903**


External fitting with OGRO Design lever handle, non-lockable.  
With handle spindle.

- silver finish
- black
- white


..39030001  
..39030002  
..39030010 PHT 3903

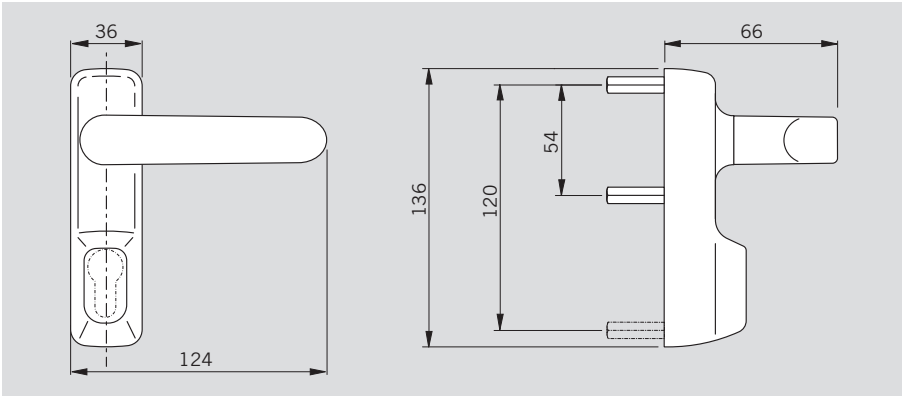


PHX 50 – Electric Strike

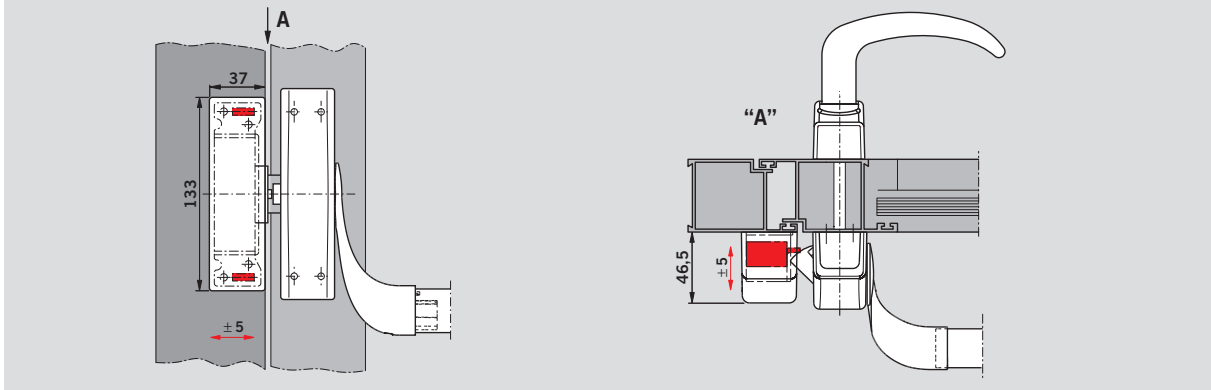

Application example for PHX 50 with PHA 2000 in the Contur design on an aluminium framed door

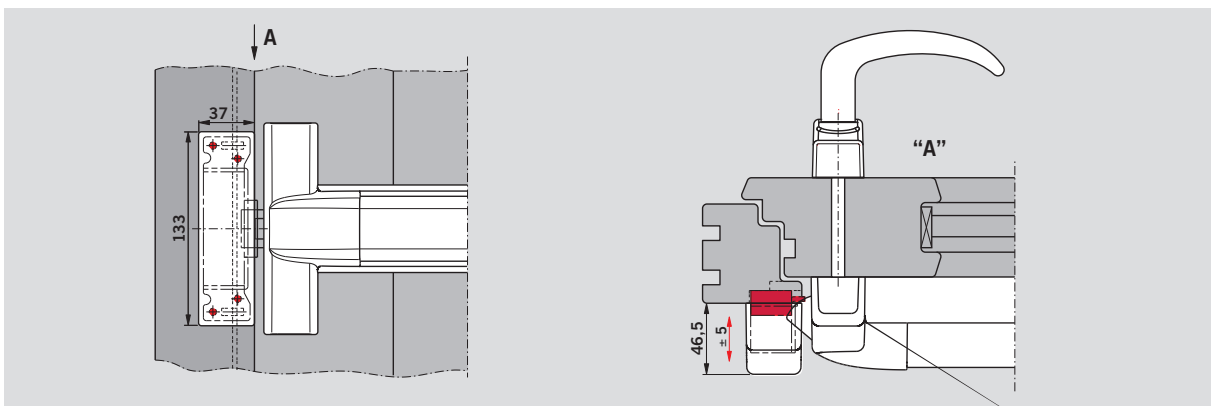


Application example for PHX 50 with PHB 3000 in the Contur design on an aluminium framed door

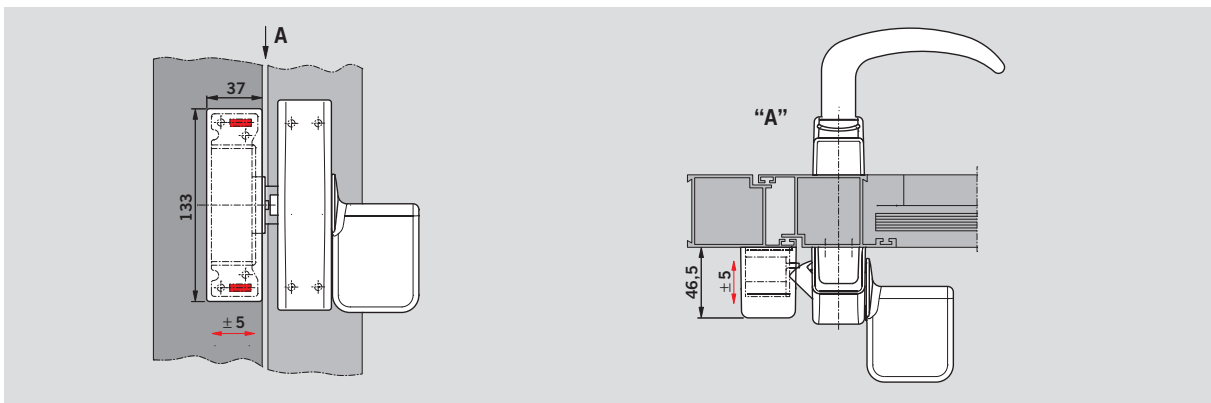


Application example for PHX 50 with Exit Pad in the Contur design on an aluminium framed door



**PHX 21 – Adjustable Latch Keeper for Aluminium Narrow-Stile Doors**

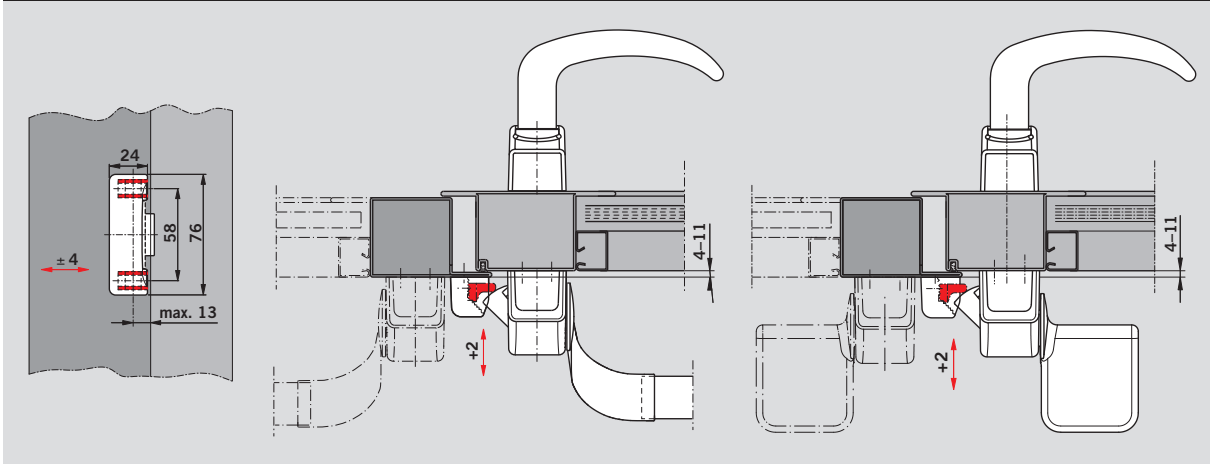


Application example of a PHX 21 on an over-rebated door, universal applicability for single-leaf and double-leaf doors

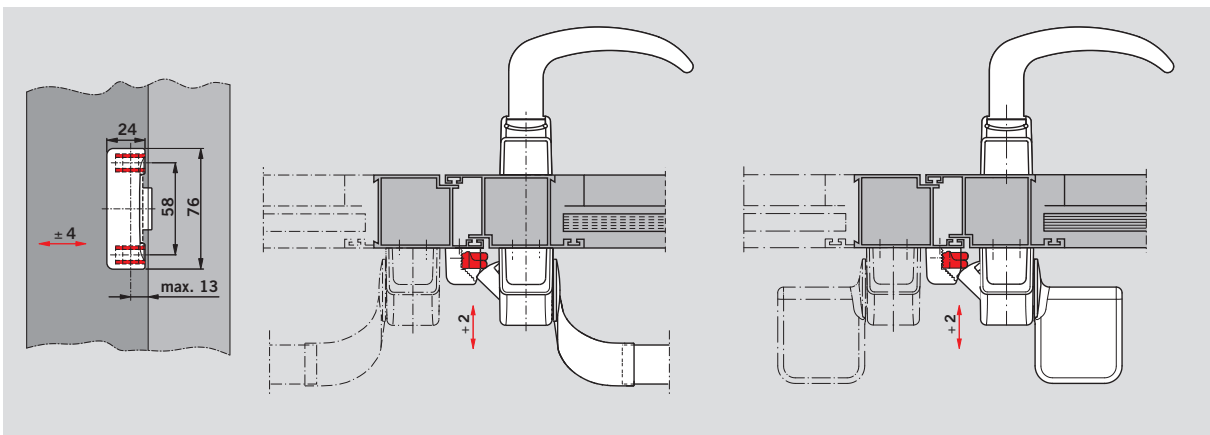

Application example of a PHX 21 on a door with flush meeting stiles, universal applicability for single-leaf and double-leaf doors

**PHX 22 – Adjustable Latch Keeper for PVC Profile Doors**

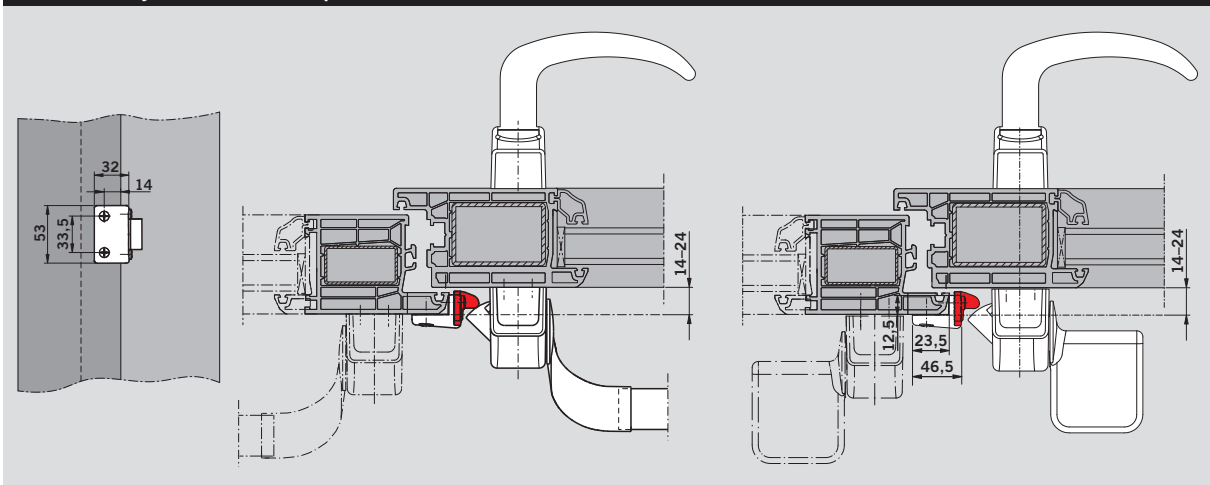


Application example of a PHX 22 on an over-rebated door, universal applicability for single-leaf and double-leaf doors

Specification text

Order No. 35014 .. 


**PHT**


External fitting with lever handle or knob, suitable for use with PHA 2000 and PHB 3000. All PHT external fittings are non-handed and carry the  mark.

**PHT 01**

External fitting with OGRO bespoke lever handle, for standard doors with a leaf thickness of up to 60 mm, prepared for installation of a Europrofile single cylinder. With lever handle spindle and two cylinder fixing bolts.

- silver finish
- black
- white


..39011001  
..39011002  
..39011010  PHT 01




**PHT 03**

External fitting with OGRO bespoke lever handle, for standard doors with a leaf thickness up to 60 mm, non-lockable. With lever handle spindle

- silver finish
- black
- white


..39031001  
..39031002  
..39031010  PHT 03




**PHT 05** 

External fitting with OGRO bespoke lever handle for fire and smoke check doors with a leaf thickness up to 60 mm. With integrated ring gasket. Prepared for installation of a Europrofile single cylinder. With lever handle spindle and two cylinder fixing bolts.

- silver finish
- black
- white
- stainless steel finish


..39051001  
..39051002  
..39051010  
..39051004  PHT 05




**PHT 06**

External fitting with knob, for standard doors with a door thickness up to 60 mm, prepared for the installation of a Europrofile single cylinder. With lever handle spindle and two cylinder fixing bolts.

- silver finish
- black
- white


..39061001  
..39061002  
..39061010  PHT 06




**PHT 07** 

External fitting, suitable for combination with OGRO ZS lever handles or ZS knobs for fire and smoke check doors. With lever handle spindle and two cylinder fixing bolts.

- silver finish
- black
- white
- stainless steel finish

..39071001  
..39071002  
..39071010  
..39071004  PHT 07




**Specification text**

**Order No. 35014 ..**


**PHT S 05 Extended Spindle**  
 8 mm square, incl. fixing screws  
 for door leaf thicknesses of 60 – 105 mm.

..39200050 PHT  
 Accessories




**F** **Gasket Set** for external fitting  
 and **PHA / PHB** exit devices fixed to  
 fire and smoke check doors.

..39200060 PHT  
 Accessories




**DORMA TL-Z 03**  
 Single Europrofile cylinder with 3 keys,  
 for PHT 01, 05, 06, 07


56510300




**PHT – External Fitting**

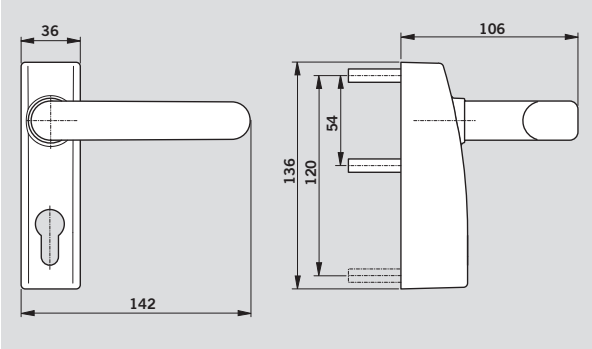

PHT 01, 03, 05 – External fitting with lever handle

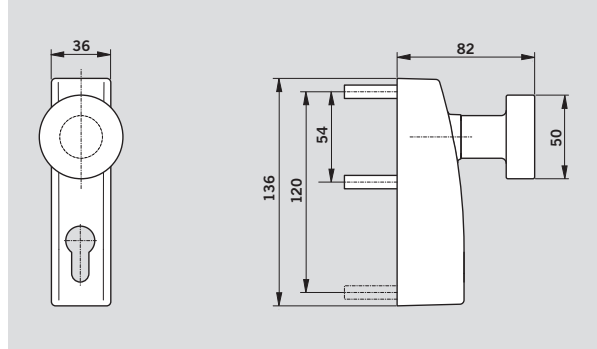

PHT 06 – External fitting with knob

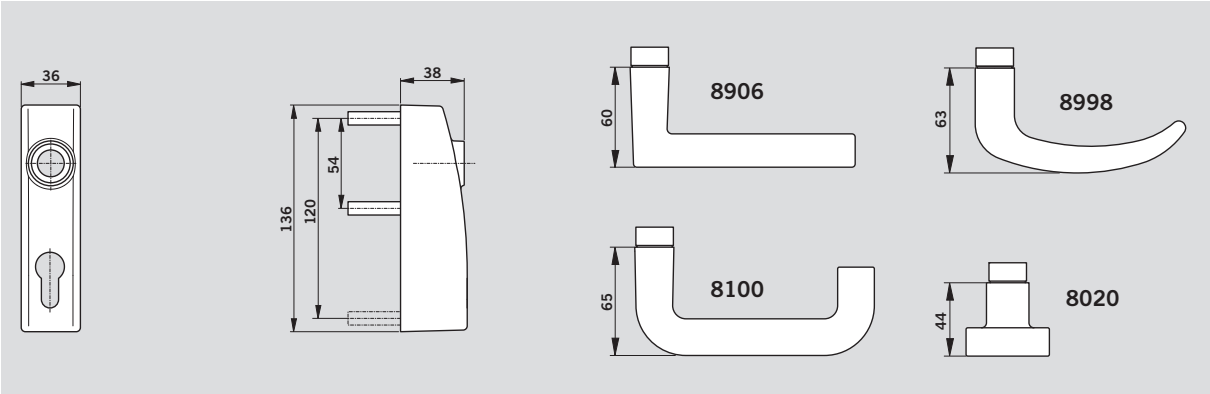


PHT 07 – External fitting, modular

**F**

When using the DORMA PHT external fitting in conjunction with the PHA or PHB panic hardware series on fire and smoke check doors, it must be ensured that the appropriate set of gaskets is used.

**CE**

The panic hardware products of the DORMA PHT series carry the **CE** mark of conformity.

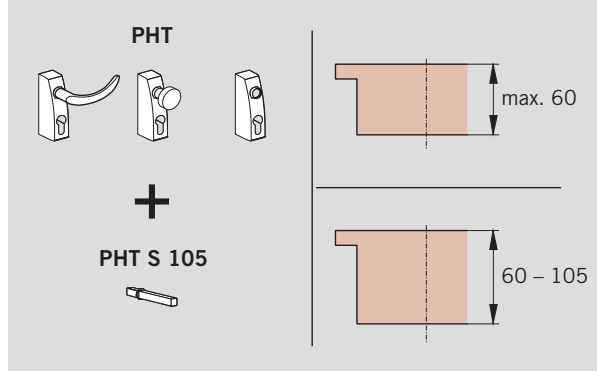



## Door Control Division worldwide

### Central Europe

DORMA GmbH + Co. KG  
Breckerfelder Str. 42-48  
D-58256 Ennepetal  
Tel. +49 2333 793-0  
Fax +49 2333 793-495

### Australasia

DORMA Door Controls Pty. Ltd.  
46-52, Abbott Road  
Hallam/Victoria 3803  
Australia  
Tel. +61 3979 63555  
Fax +61 3979 63955

### China/Hong Kong

DORMA Door Controls  
(Suzhou) Co. Ltd.  
No. 9, Hong Feng Road  
Suzhou Singapore Industrial Park  
Suzhou, 215021  
P.R. of China  
Tel. +86 512 67612481  
Fax +86 512 67614582

DORMA Door Controls Pte. Ltd.  
Room 701, Technology Plaza  
651 King's Road  
North Point  
Hong Kong  
Tel. +852 25034632  
Fax +852 28875370

### Emerging Markets

DORMA GmbH + Co. KG  
Breckerfelder Str. 42-48  
D-58256 Ennepetal  
Tel. +49 2333 793-0  
Fax +49 2333 793-495

DORMA Door Controls (Pty.) Ltd.

Kings Court  
4A Mineral Crescent  
ZA-2000 Crown/Gauteng  
South Africa  
Tel. +27 11 8300280  
Fax +27 11 8300291

### Far East

DORMA Far East Pte. Ltd.  
No. 31 Gul Lane  
Singapore 629425  
Tel. +65 6268 7633  
Fax +65 6265 7995

### France

DORMA France S.A.S.  
Europarc  
42, rue Eugène Dupuis  
F-94046 Créteil  
Tel. +33 1 41942400  
Fax +33 1 41942401

### Gulf

DORMA Gulf Door Controls FZE  
Jebel Ali Free Zone South  
Plot No. S 20135  
Road No. SW 301 G  
P.O. Box 17268  
Dubai – United Arab Emirates  
Tel. +971 4 8020400  
Fax +971 4 8869100/8869101

### North America

DORMA Architectural Hardware  
DORMA Drive, Drawer AC  
Reamstown, PA 17567-0411  
Tel. +1 800 5238483  
Fax +1 800 2749724

### Scanbalt

DORMA Sverige AB  
F O Petersons Gata 24  
SE-421 31 Västra Frölunda  
Tel. +46 31 289520  
Fax +46 31 281739

### South America

DORMA Sistemas de Controles  
para Portas Ltda.  
Av. Piracema, 1400  
Centro Empresarial Tambore  
CEP 06400-933 Barueri/  
São Paulo, Brasil  
Tel. +55 11 46899280  
Fax +55 11 46899215

### South-East Europe

DORMA AUSTRIA GmbH  
Pebering Strass 22  
A-5301 Eugendorf  
Tel. +43 6225 284880  
Fax +43 6225 28491

### South Europe

DORMA Italiana S.r.l.  
Via. Canova 44/46  
I-20035 Lissone (MI)  
Tel. +39 039 244031  
Fax +39 039 24403310  
DORMA Ibérica, S.A.  
Camino San Martin de la Vega, 4  
E-28500 Arganda del Rey  
(Madrid)  
Tel. +34 91 8757850  
Fax +34 91 8757881

### UK/Ireland

DORMA UK Ltd.  
Wilbury Way  
Hitchin  
GB-Hertfordshire SG4 0AB  
Great Britain  
Tel. +44 1462 477600  
Fax +44 1462 477601



Door Control



Automatic



Glass Fittings  
and Accessories



Security/Time  
and Access (STA)



Movable Walls



4 021 226 1272008